

# 工业用插头、插座、耦合器（连接器）及接插装置

Industrial Power Plug, Socket, Coupler (Connector)

www.cnmcbb.com


## 第三代工业用插头 Industrial Plug



LKE-013X-4 LKE-023X-4

|  |        |            |
|--|--------|------------|
| earth contact position                             | 4h     |            |
| rated current(A)                                   | 16     | 32         |
|  | pole 3 |            |
| dimension(mm)                                      | a      | 58 80.7    |
|  | b      | 47 63      |
|  | φ c    | 7-15 10-20 |
|  | d      | 135 171    |
|  | e      | 104 130    |
| cable nominal cross-section area(mm <sup>2</sup> ) | 1-2.5  | 2.5-6      |


电 流 Current(A): 16A, 32A  
电 压 Voltage(V): 110-130V~2P+E  
防护等级 Protection degree: IP44



LKE-013X LKE-023X

|  |        |            |
|--|--------|------------|
| earth contact position                             | 6h     |            |
| rated current(A)                                   | 16     | 32         |
|  | pole 3 |            |
| dimension(mm)                                      | a      | 58 80.7    |
|  | b      | 47 63      |
|  | φ c    | 7-15 10-20 |
|  | d      | 135 171    |
|  | e      | 104 130    |
| cable nominal cross-section area(mm <sup>2</sup> ) | 1-2.5  | 2.5-6      |


电 流 Current(A): 16A, 32A  
电 压 Voltage(V): 220-240V~2P+E  
防护等级 Protection degree: IP44



LKE-014X LKE-024X

|  |        |            |
|--|--------|------------|
| earth contact position                             | 6h     |            |
| rated current(A)                                   | 16     | 32         |
|  | pole 4 |            |
| dimension(mm)                                      | a      | 66.7 85    |
|  | b      | 53.5 63    |
|  | φ c    | 7-15 10-20 |
|  | d      | 140 171    |
|  | e      | 103 130    |
| cable nominal cross-section area(mm <sup>2</sup> ) | 1-2.5  | 2.5-6      |


电 流 Current(A): 16A, 32A  
电 压 Voltage(V): 380-415V~3P+E  
防护等级 Protection degree: IP44



LKE-015X LKE-025X

|  |        |            |
|--|--------|------------|
| earth contact position                             | 6h     |            |
| rated current(A)                                   | 16     | 32         |
|  | pole 5 |            |
| dimension(mm)                                      | a      | 75 89      |
|  | b      | 60 70      |
|  | φ c    | 8-16 12-22 |
|  | d      | 145 178    |
|  | e      | 112 132    |
| cable nominal cross-section area(mm <sup>2</sup> ) | 1-2.5  | 2.5-6      |


电 流 Current(A): 16A, 32A  
电 压 Voltage(V): 220-380V~ 3P+N+E  
240-415V~  
防护等级 Protection degree: IP44

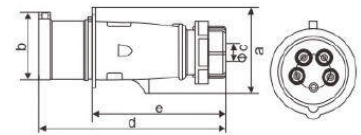

LKE-0132-4 LKE-0232-4

|  |        |            |
|--|--------|------------|
| earth contact position                             | 4h     |            |
| rated current(A)                                   | 16     | 32         |
|  | pole 3 |            |
| dimension(mm)                                      | a      | 75.5 99    |
|  | b      | 47 63      |
|  | φ c    | 7-15 10-20 |
|  | d      | 135 171    |
|  | e      | 98 125     |
| cable nominal cross-section area(mm <sup>2</sup> ) | 1-2.5  | 2.5-6      |


电 流 Current(A): 16A, 32A  
电 压 Voltage(V): 110-130V~2P+E  
防护等级 Protection degree: IP67

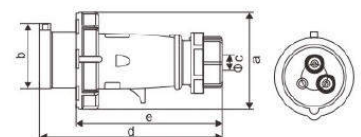

LKE-0132 LKE-0232

|  |        |            |
|--|--------|------------|
| earth contact position                             | 6h     |            |
| rated current(A)                                   | 16     | 32         |
|  | pole 3 |            |
| dimension(mm)                                      | a      | 75.5 99    |
|  | b      | 47 63      |
|  | φ c    | 7-15 10-20 |
|  | d      | 139 175    |
|  | e      | 112 130    |
| cable nominal cross-section area(mm <sup>2</sup> ) | 1-2.5  | 2.5-6      |

电 流 Current(A): 16A, 32A  
电 压 Voltage(V): 220-240V~2P+E  
防护等级 Protection degree: IP67

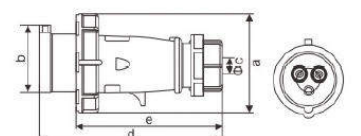



3pol 4pol 5pol  
4h 4h 4h



3pol 4pol 5pol  
6h 3h 5h



3pol 4pol 5pol  
9h 6h 6h



3pol 4pol 5pol  
7h 7h 7h



3pol 4pol 5pol  
19h 10h 10h



3pol 4pol 5pol  
2h 2h 2h



3  
2P+E




4  
3P+E



5  
3P+N+E

www.cnmcbb.com

电 流 Current(A): 16A. 32A  
电 压 Voltage(V): 380-415V~3P+E  
防护等级 Protection degree: IP67




|  |       |       |       |
|--|-------|-------|-------|
| earth contact position                             | 6h    |       |       |
| rated current(A)                                   | 16    | 32    |       |
|  | pole  | 4     |       |
| dimension(mm)                                      | a     | 83    | 99    |
|  | b     | 53.5  | 63    |
|  | φ c   | 7-15  | 10-20 |
|  | d     | 143   | 175   |
|  | e     | 108   | 129   |
| cable nominal cross-section area(mm <sup>2</sup> ) | 1-2.5 | 2.5-6 |       |



LKE-0142 LKE-0242

电 流 Current(A): 16A. 32A  
电 压 Voltage(V): 220-380V~  
240-415V~3P+N+E  
防护等级 Protection degree: IP67



|  |       |       |       |
|--|-------|-------|-------|
| earth contact position                             | 6h    |       |       |
| rated current(A)                                   | 16    | 32    |       |
|  | pole  | 5     |       |
| dimension(mm)                                      | a     | 92    | 107   |
|  | b     | 60    | 70    |
|  | φ c   | 8-16  | 12-22 |
|  | d     | 139   | 170   |
|  | e     | 95    | 124   |
| cable nominal cross-section area(mm <sup>2</sup> ) | 1-2.5 | 2.5-6 |       |



LKE-0152 LKE-0252