

工业用插头、插座、耦合器（连接器）及接插装置

Industrial Power Plug, Socket, Coupler (Connector)

www.cnmccb.com


工业用插座 Industrial Socket



LKE-313X-4 LKE-323X-4

earth contact position	4h	
rated current(A)	16	32
	pole	3
dimension(mm)	a	93 103
	b	51.5 58
	c	34 39
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP44

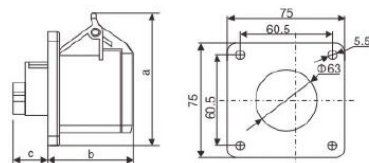

LKE-313X LKE-323X

earth contact position	6h	
rated current(A)	16	32
	pole	3
dimension(mm)	a	93 103
	b	51.5 58
	c	34 39
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP44

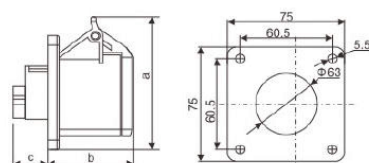

LKE-314X LKE-324X

earth contact position	6h	
rated current(A)	16	32
	pole	4
dimension(mm)	a	100 103
	b	51.5 58
	c	34 39
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 380-415V~3P+E
防护等级 Protection degree: IP44

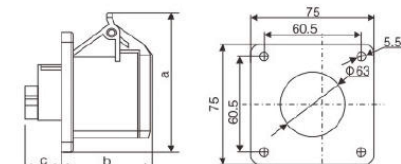

LKE-315X LKE-325X

earth contact position	6h	
rated current(A)	16	32
	pole	5
dimension(mm)	a	101 110
	b	51.5 58
	c	34 39
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-380V~ 3P+N+E
240-415V~
防护等级 Protection degree: IP44

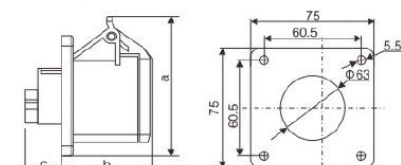

LKE-3132-3 LKE-3232-4

earth contact position	4h	
rated current(A)	16	32
	pole	3
dimension(mm)	a	81 99
	b	55.5 66
	c	32 39
	d	77 102
cable nominal cross-section area(mm ²)	1-2.5	2.5-6


电 流 Current(A): 16A, 32A
电 压 Voltage(V): 110-130V~2P+E
防护等级 Protection degree: IP67

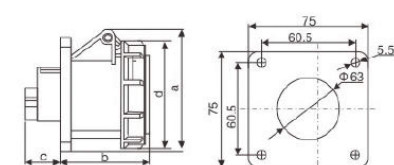

LKE-3132 LKE-3232


earth contact position	6h	
rated current(A)	16	32
	pole	3
dimension(mm)	a	81 99
	b	55.5 66
	c	32 38
	d	77 102
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

电 流 Current(A): 16A, 32A
电 压 Voltage(V): 220-240V~2P+E
防护等级 Protection degree: IP67

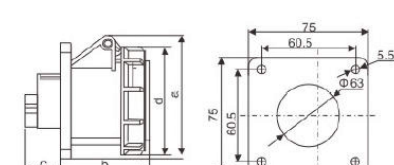



电 流 Current(A): 16A. 32A
 电 压 Voltage(V): 380-415V~3P+E
 防护等级 Protection degree: IP67

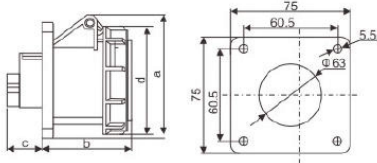


earth contact position	6h	
rated current(A)	16	32
	pole 4	
dimension(mm)	a	88
	b	55.5
	c	33.5
	d	83
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LKE-3142 LKE-3242

电 流 Current(A): 16A. 32A
 电 压 Voltage(V): 220-380V~ 240-415V~ 3P+N+E
 防护等级 Protection degree: IP67

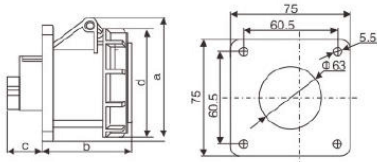


earth contact position	6h	
rated current(A)	16	32
	pole 5	
dimension(mm)	a	96
	b	55.5
	c	33.5
	d	96
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LKE-3152 LKE-3252

电 流 Current(A): 16A. 32A
 电 压 Voltage(V): 110-130V~2P+E
 防护等级 Protection degree: IP44

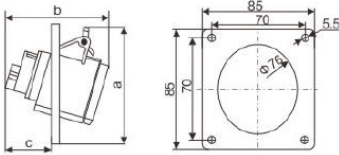


earth contact position	4h	
rated current(A)	16	32
	pole 3	
dimension(mm)	a	89
	b	88
	c	44
cable nominal cross-section area(mm ²)	1-2.5	2.5-6

工业用插座 Industrial Socket



LKE-413X-4 LKE-423X-4

电 流 Current(A): 16A. 32A
 电 压 Voltage(V): 220-240V~2P+E
 防护等级 Protection degree: IP44

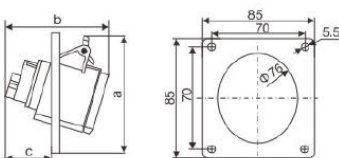


earth contact position	6h	
rated current(A)	16	32
	pole 3	
dimension(mm)	a	89
	b	88
	c	44
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LKE-413X LKE-423X

电 流 Current(A): 16A. 32A
 电 压 Voltage(V): 380-415V~3P+E
 防护等级 Protection degree: IP44

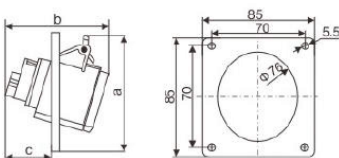


earth contact position	6h	
rated current(A)	16	32
	pole 4	
dimension(mm)	a	97
	b	91
	c	41
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LKE-414X LKE-424X

电 流 Current(A): 16A. 32A
 电 压 Voltage(V): 220-380V~ 240-415V~ 3P+N+E
 防护等级 Protection degree: IP44

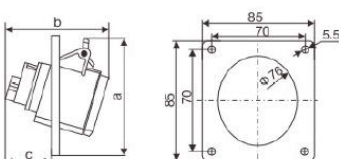

earth contact position	6h	
rated current(A)	16	32
	pole 5	
dimension(mm)	a	103
	b	94
	c	41
cable nominal cross-section area(mm ²)	1-2.5	2.5-6



LKE-415X LKE-425X




LKE-4132-4 LKE-4232-4

earth contact position	4h		
rated current(A)	16	32	
	pole	3	
dimension(mm)	a	85	99
	b	90	114
	c	41	53
	d	77	101
cable nominal cross-section area(mm ²)	1-2.5	2.5-6	

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 110-130V~2P+E

防护等级 Protection degree: IP67

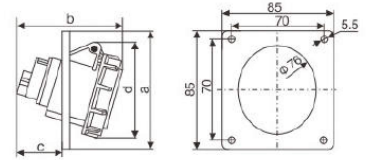


LKE-4132 LKE-4232

earth contact position	6h		
rated current(A)	16	32	
	pole	3	
dimension(mm)	a	85	99
	b	90	114
	c	41	53
	d	77	101
cable nominal cross-section area(mm ²)	1-2.5	2.5-6	

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 220-240V~2P+E

防护等级 Protection degree: IP67

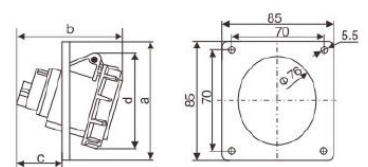


LKE-4142 LKE-4242

earth contact position	6h		
rated current(A)	16	32	
	pole	4	
dimension(mm)	a	91	99
	b	93	114
	c	41	53
	d	83	101
cable nominal cross-section area(mm ²)	1-2.5	2.5-6	

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 380-415V~3P+E

防护等级 Protection degree: IP67

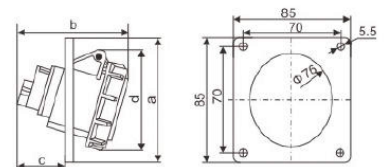

LKE-4152 LKE-4252

earth contact position	6h		
rated current(A)	16	32	
	pole	5	
dimension(mm)	a	98	105
	b	94	110
	c	41	41
	d	96	108
cable nominal cross-section area(mm ²)	1-2.5	2.5-6	

电 流 Current(A): 16A, 32A

电 压 Voltage(V): 220-380V~ 3P+N+E

240-415V~
防护等级 Protection degree: IP67

