




第二代工业用插头 Second Industrial Plug



LK-013-4 LK-023-4

earth contact position	4h		
rated current(A)	16	32	
	pole 3		
dimension(mm)	a	118	146
	b	82	100
	c	47	63
	d	6-15	10-20
	sw	38	50
cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	


电 流 Current(A): 16A. 32A  
电 压 Voltage(V): 110-130V~2P+E  
防护等级 Protection degree: IP44




LK-013 LK-023

earth contact position	6h		
rated current(A)	16	32	
	pole 3		
dimension(mm)	a	118	146
	b	82	100
	c	47	63
	d	6-15	10-20
	sw	38	50
cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	

电 流 Current(A): 16A. 32A  
电 压 Voltage(V): 220-240V~2P+E  
防护等级 Protection degree: IP44



电 流 Current(A): 16A. 32A  
电 压 Voltage(V): 380-415V~3P+E  
防护等级 Protection degree: IP44

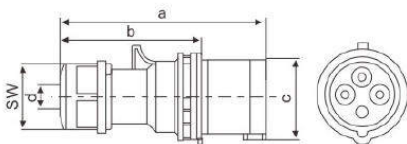


earth contact position	6h		
rated current(A)	16	32	
	pole 4		
dimension(mm)	a	124	146
	b	88	100
	c	53	63
	d	6-15	10-20
	sw	38	50
cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	



LK-014 LK-024

电 流 Current(A): 16A. 32A  
电 压 Voltage(V): 220-380V~240-415V~3P+N+E  
防护等级 Protection degree: IP44

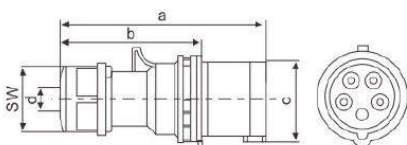


earth contact position	6h		
rated current(A)	16	32	
	pole 5		
dimension(mm)	a	131	152
	b	95	106
	c	61	70
	d	8-16	10-20
	sw	42	50
cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	



LK-015 LK-025

电 流 Current(A): 16A. 32A  
电 压 Voltage(V): 110-130V~2P+E  
防护等级 Protection degree: IP67

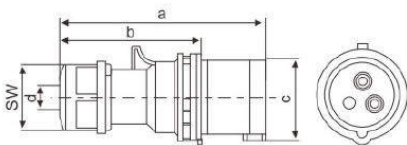


earth contact position	4h		
rated current(A)	16	32	
	pole 3		
dimension(mm)	a	118	146
	b	82	100
	c	47	63
	d	6-15	10-20
	sw	38	50
cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	



LK-0132-4 LK-0232-4

电 流 Current(A): 16A. 32A  
电 压 Voltage(V): 220-240V~2P+E  
防护等级 Protection degree: IP67

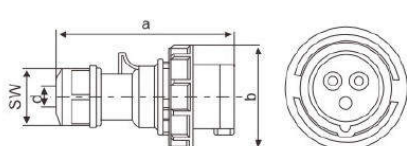


earth contact position	6h		
rated current(A)	16	32	
	pole 3		
dimension(mm)	a	118	146
	b	82	100
	d	6-15	10-20
	sw	38	50
cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	



LK-0132 LK-0232

电 流 Current(A): 16A, 32A  
电 压 Voltage(V): 380-415V~3P+E  
防护等级 Protection degree: IP67

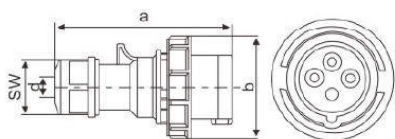


earth contact position	6h		
rated current(A)	16	32	
	pole 4		
dimension(mm)	a	124	146
	b	79	93
	d	6-16	10-20
	sw	38	50
cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	



LK-0142 LK-0242

电 流 Current(A): 16A, 32A  
电 压 Voltage(V): 220-380V~3P+N+E  
240-415V~  
防护等级 Protection degree: IP67

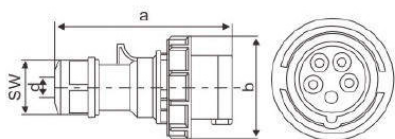

earth contact position	6h		
rated current(A)	16	32	
	pole 5		
dimension(mm)	a	131	152
	b	87	100
	d	8-16	10-20
	sw	42	50
cable nominal cross-section area(mm <sup>2</sup> )	1-2.5	2.5-6	




LK-0152 LK-0252



LK-0332-4 LK-0432-4

earth contact position	4h		
rated current(A)	63	125	
	pole 3		
dimension(mm)	a	240	295
	b	115	126
	c	30	44.5
cable nominal cross-section area(mm <sup>2</sup> )	6-16	16-50	


电 流 Current(A): 63A, 125A  
电 压 Voltage(V): 110-130V~2P+E  
防护等级 Protection degree: IP67

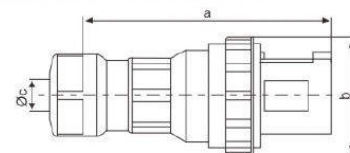

LK-0332 LK-0432

earth contact position	6h		
rated current(A)	63	125	
	pole 3		
dimension(mm)	a	240	295
	b	115	126
	c	30	44.5
cable nominal cross-section area(mm <sup>2</sup> )	6-16	16-50	


电 流 Current(A): 63A, 125A  
电 压 Voltage(V): 220-250V~2P+E  
防护等级 Protection degree: IP67

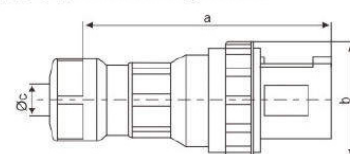

LK-0342 LK-0442

earth contact position	6h		
rated current(A)	63	125	
	pole 4		
dimension(mm)	a	240	295
	b	115	126
	c	30	44.5
cable nominal cross-section area(mm <sup>2</sup> )	6-16	16-50	

电 流 Current(A): 63A, 125A  
电 压 Voltage(V): 380-415V~3P+E  
防护等级 Protection degree: IP67

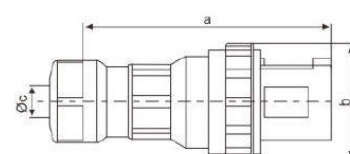

LK-0352 LK-0452

earth contact position	6h		
rated current(A)	63	125	
	pole 5		
dimension(mm)	a	240	295
	b	115	126
	c	30	44.5
cable nominal cross-section area(mm <sup>2</sup> )	6-16	16-50	

电 流 Current(A): 63A, 125A  
电 压 Voltage(V): 220-380V~3P+N+E  
240-415V~  
防护等级 Protection degree: IP67

